# U-TV0.35XC-2

C-mount 0.35X camera adapter



## **SPECIFICATIONS**

N6383200 / U-TV0.35XC-2-8
None
Camera Adaptor
0.35X (-)
ø9.3 mm (In combinations with OFN26.5 Objectives) However, the value may be less than this value depending on combi- nations with objectives, illuminators, intermediate attachments, etc.
Refer to MAIN DIMENSION
Circular dovetail (fixing with a tool)
C-Mount
Adjustment by moving the built-in lens ±0.45 mm (Image Plane)
None
100 (%) 30 (%) 30 (
wavelengtri (htt)
About 0.18 kg

## SYSTEM ENVIRONMENT LIMITATIONS FOR OPERATION

Environment	Indoor use
Temperature T0 [°C]	5 - 40
Humidity RH0 [%]	30 - 85

## U-TV0.35XC-2


## RESTRICTIONS

Optical performance may deteriorate when an objective lens other than UIS2 is combined. Optical performance may deteriorate depending on the combination with a laser. Vignetting may occur depending on the length of the intermediate tube.

#### **PACKING LIST**

Item	Quantity
Adapter unit	1

### MAIN DIMENSION

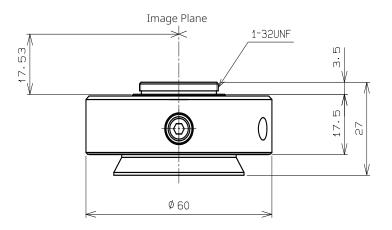

(Unit: mm)

· Specifications and appearances are subject to change without any notice or obligation on the part of the manufacturer.