



AM2R-20X22-60

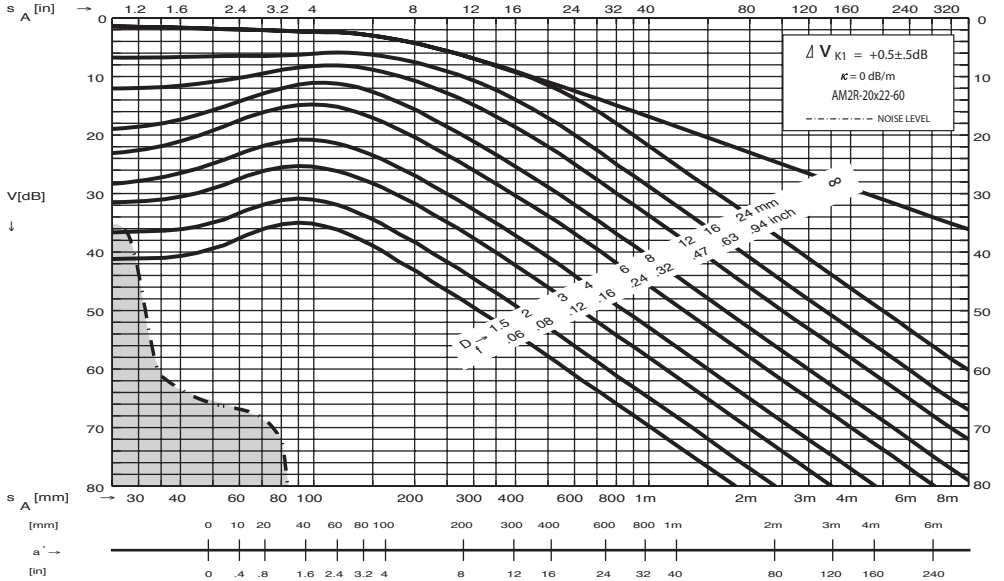

PARAMETER parameter/paramètre	NOMINAL nennwert/nominal	UPPER (+) ober bereich/supérieure	LOWER (-) unterer bereich/inférieure	UNIT meßeinheit/unité
f_c^1, f_0^2	2.0	2.2	1.8	MHz
$BW^1, \Delta f_{rel}^2$	40	55	25	%
Z	40	48	32	Ω
Φ	36	56	16	$^\circ$
N	90	108	72	mm
W_{a6}	3.0	3.3	2.7	mm
W_{b6}	4.7	5.2	4.2	mm
a	22.0	22.0	21.8	mm
a_{eff}	21.1	21.4	20.8	mm
b	20.0	20.0	19.8	mm
b_{eff}	19.2	19.5	18.9	mm
$\alpha_{(325m/s)}$	60	62	58	$^\circ$
$\Delta\alpha/\Delta T$	0.7	0.8	0.6	$^\circ/10^\circ C$
$lv_{(2743m/s)}$	19.5	21.5	17.5	mm
δ	0	+1	-1	$^\circ$
e	0	+1	-1	mm
x	28	30	26	mm
γ_{a6}	1.9	2.4	1.4	$^\circ$
γ_{b6}	3.0	3.5	2.5	$^\circ$
M	5	n/a	n/a	mm
T_r	-20/+60	n/a	n/a	$^\circ C$
Waveform duration ¹ , Echo width ² , Echobreite ² , Largeur de l'écho ²				
-20dB	2.3	2.5	n/a	μs

AM2R-20X22-60



$$S_V = 16.4 \pm 2 \text{ mm}$$

$$s = s_A - S_V$$

s_V is the sound field equivalent of delay path length (lv)

s_V entspricht im Schallfeld der Länge der Vorlaufstrecke lv

s_V est l'équivalent du champ acoustique de la longueur de la ligne de retard